


# GJTF

## Features

The GJTF type light-load series steel wire rope isolator features good vibration isolation performance, multi-directional elastic deformation, long service life, various installation methods, wide-frequency vibration isolation, temperature resistance, corrosion resistance, high load capacity, and compact structure. It is widely used in military, high-tech, and industrial fields with high seismic requirements.

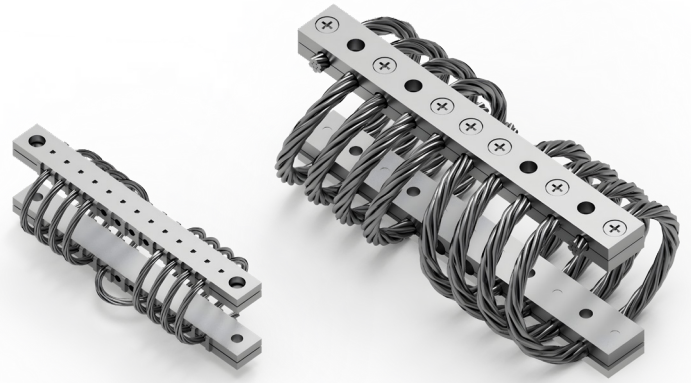

## Technical Data

Type	Model No.	Performance Parameters				
		Rated load (N)	Max. load (N)	Max. Deformation (mm)	Natural Frequency (Hz)	Damping Ratio (C/Cc)
GJTF	5	5	15	5	8-12	≥0.15
	6	6	15	6		
	6	6	18	6		
	8	8	24	6		
	10	10	30	6		
	15	15	35	5		
	20	20	60	12		
	30	30	80	10		
	30	30	60	6		
	34	34	90	8		
	40	40	120	6		
	30	30	90	14		
	50	50	150	12		
	70	70	200	11		
	150	150	400	12		
	150	150	500	13		
	50	50	150	25		
	100	100	300	25		
	200	200	600	23		
	300	300	900	18		
400	400	1200	32			
250	250	750	35			
400	400	1100	35			
600	600	1600	28			
800	800	2000	25			

## Installation Dimensions ( mm )

Type	Model No.	A	B	D	H	W
GJTF	5	65	56	4.5	26	27
	6				22	25
	6				21	24
	8				20	23.5
	10	80	69	4.5	19	25
	15				18	20
	20				27	29
	30				24	26
	30	92	80	5.5	19.5	23.5
	34				25	31
	40				29	33
	30				38	43
	50	112	100	5.5	35	41
	70				33	38
	150				38	46
	150				128	114
	50	156	114	7	75	85
	100				65	75
	200				61	70
	300				56	65
400	156	114	7	52	60	
250				88	95	
400				83	87	
600				146	104	7
800	65	65				

